





Type: 4066-OC-A-F03-LH

ARCHITECT SPECIFICATIONS

The headset microphone shall be a pre-polarized condenser type with an omni-directional polar pattern. The microphone diameter shall be 5.4 mm (0.21 in). The frequency response shall be 20 Hz to 20 kHz with an effective frequency range within ± 2 dB from 40 Hz to 20 kHz and with a 3 dB soft boost at 8 – 20 kHz. The sensitivity shall be 6 mV/Pa (-44 dB re. 1V/Pa) at 1 kHz within a tolerance of ± 3 dB. The equivalent noise level shall be 26 dB(A). The microphone shall not exceed 1% THD at 137 dB SPL peak. The microphone shall have a dynamic range of 111 dB. The Max. SPL (10 % THD) shall be 144 dB SPL peak. The rated output impedance shall be 30 – 40 Ω and the connector type shall be LEMO 3-pin. The cable length shall be 1.2 m with a cable diameter of 1.6 mm and in beige color. The microphone boom and detachable cap shall be beige while the stainless-steel grid of the cap shall have a golden appearance. The microphone shall be protected against water and dust to an IP58 rating. The operating temperature shall range from -40°C to 45°C (-40°F to 113°F) and the microphone shall function in humidity levels up to 90%. The polarity of the signal on pin 3 shall be positive going for a positively increasing sound pressure.

The microphone shall be the DPA 4066 Omnidirectional Microphone type 4066-OC-A-F03-LH

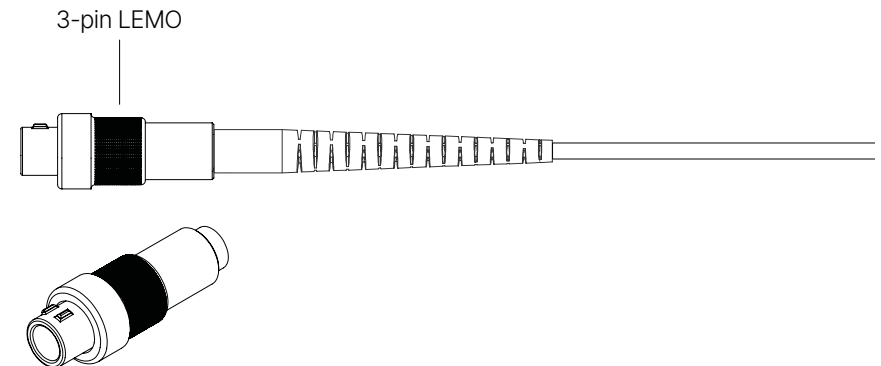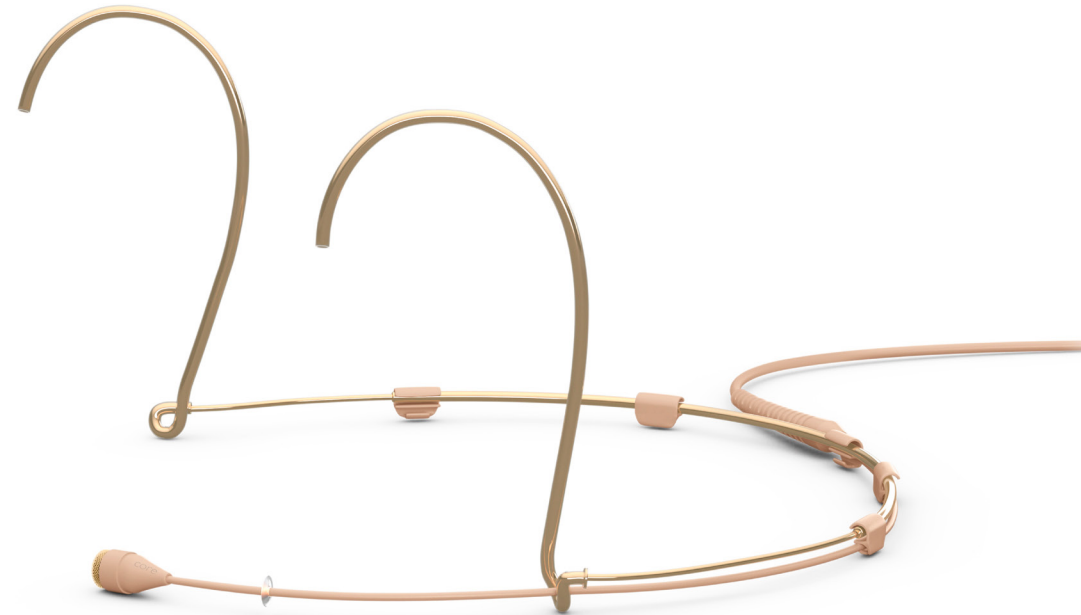

TECHNICAL SPECIFICATIONS

| 4066-OC-A-F03-LH | |
|---|--|
| Directional pattern | Omnidirectional |
| Principle of operation | Pressure |
| Cartridge type | Pre-polarized condenser |
| Frequency response | 20 Hz - 20 kHz |
| Effective frequency range ± 2 dB | Soft boost grid: 40 Hz - 20 kHz, 3 dB soft boost at 8 - 20 kHz. High boost grid: 40 Hz - 20 kHz, 10 dB boost at 12 kHz |
| Sensitivity, nominal, ± 2.4 dB at 1 kHz | 6 mV/Pa; -44 dB re. 1 V/Pa |
| Equivalent noise level, A-weighted | Typ. 26 dB(A) re. 20 μ Pa (max. 28 dB(A)) |
| Distortion, THD < 1% | 134 dB SPL RMS, 137 dB SPL peak |
| Dynamic range | Typ. 111 dB |
| Max. SPL, THD 10% | 144 dB SPL peak |
| Rated output impedance | 30 - 40 Ω |
| Power supply (for full performance) | For wireless systems: Min. 5 V - max. 10 V |
| Current consumption | Typ. 1.5 mA |
| Connector | 3-pin LEMO |
| Color | Beige |
| Weight | 14 g (0.5 oz) incl. Cable and MicroDot connector |
| Microphone diameter | 5.4 mm (0.21 in) |
| Cable length | 1.2 m (3.9 ft) |
| Polarity | Positively increasing sound pressure produces positive going voltage on LEMO pin 3 |
| Temperature range | -40°C to 45°C (-40°F to 113°F) |
| Relative humidity (RH) | Up to 90% |